

MaxLong SE332 2-Port Serial To Ethernet Converter



Features

- Support Multiple TCP connections
- Support TCP Server / TCP Client / UDP / Virtual COM / Pairing
- Support DDNS, PPPoE
- Built in termination resistor
- Web Browser configuration
- Easy installation Windows utility
- On line F/W upgrade

Specification

Hardware

CPU : RISC CPU, 16 bits, 100 MHz,
RAM : 2MB Internal SDRAM
ROM : 256K bytes Flash ROM
Watchdog : Built in H/W Watchdog timer

Ethernet

Port number : 1
Port Type : RJ-45 Connector
Speed : 10 / 100 Mbps (Auto Detect)
Protocol : ARP, IP, ICMP, UDP, TCP, HTTP, DHCP, TELNET
DDNS, PPPoE
Mode : TCP Server / TCP Client / UDP / Virtual Com /
Pairing
Setup : HTTP Browser Setup (IE, Chrome, Firefox)
Security : Login Password
Protection : Built-in 1.5KV Magnetic Isolation

Serial Interface

Port number : 2
Port Type : RS-232 x 1 Port (DB9),
RS-422/485 x 1 Port (Auto Detect)
Connector : Male DB9 / 4-pin Terminal Block
Speed : 110 bps ~ 230.4 Kbps
Parity : None , Odd , Even , Mark , Space
Data Bit : 5, 6, 7, 8
Stop Bit : 1, 1.5, 2
Port 1 RS-232 : Rx, Tx, GND, RTS, CTS, DTR, DSR, DCD
Port 2 RS-232 : Rx, Tx, GND
RS-422 : Rx+, Rx-, Tx+, Tx-
RS-485 : Data+, Data-
Built-in : RS-422/485 pull high / low Resistor
Protection : 422/485 Surge Protection
Built in 15KV ESD protection for all signals

LED SYS (PWR), LAN, Rx, Tx

Software Features

OS Supported : Win 2000/2003/XP/Vista/Win 7/Win 8
Configuration : Window Utility, Web Browser

Power

Input : DC 9 ~ 24V, 500mA@ 12VDC
Connector : DC Jack & 2-pin terminal block

Environment


Temperature : Operating: 0°C ~ 65°C (32°F ~ 149°F)
Storage: -20°C ~ 70°C (-4°F ~ 158°F)
Humidity : Operating: 5% ~ 95% non-condensing
Storage: 5% ~ 95% non-condensing

Regulatory Approval

FCC Part15 Class A
CE EN55022 Class A, EN55024
RoHS Compliance

Warranty 1 Year

Applications

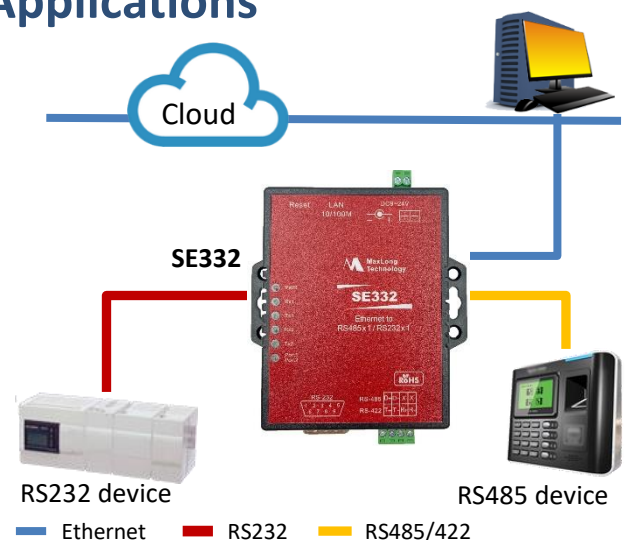

Product specifications are subject to change without notice

MaxLong Technology Co.,Ltd- IoT Sensors Gateway

Tel: +886-3-6685-166, email: jerrypeng@maxlong.com.tw,

Web: www.maxlong.com.tw