




## SKY 401 Lighting arrester (Wavelength Type)

### Electrical Specification

Frequency ranges	DC-3GHz
Gain	0.9dB
VSWR	<1.5
Impedance	50 Ohms
Insulation	10,000M Ohm
Max withstanding Current@8/20uS	10KA
Dc Vreakdown Voltage@100V/S	90V /DC
Impulse Breakdown Voltage@1KV/uS	≤800V
Power	50W
Electrode Capacitance	≤1.5pF
Weight	127g
Dimension	22.8 x 64.7 x 32 mm
Connector	N-Male to N-Female
製作方式	波長式

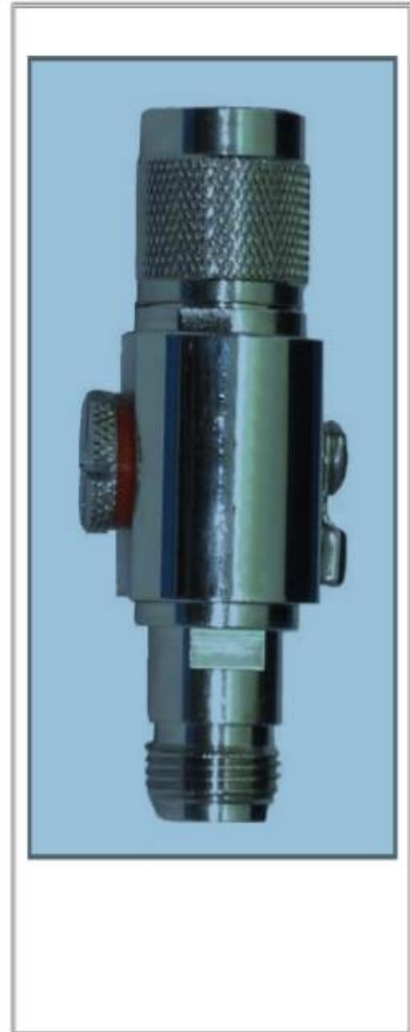

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN MILLIMETERS  
SURFACE FINISH:  
TOLERANCES: +0.03  
LINEAR: +0.03  
ANGULAR: +0.5 deg

DIMENSIONS  
ARE IN  
MILLIMETERS  
XXXX = +/- 2  
XXX = +/- 1  
XX = +/- 0.5  
X = +/- 0.1  
X.X = +/- 0.05  
X.XX = +/- 0.02  
X.XXX = +/- 0.005

