



碩久科技有限公司

MaxLong Technology Co., Ltd


SEW832-2 Modbus TCP with Modbus Digital IO

Features

- Built-in MediaTek smart 7688
- Linux OpenWrt OS
- Wide Range Input Power (DC 9 ~ 32V)
- Edge Computer with Multiple I/O Interfaces
- Low Cost Solution or 4G IoT
- Ethernet + WiFi + 4G (Option) + Serial + DIO



架構

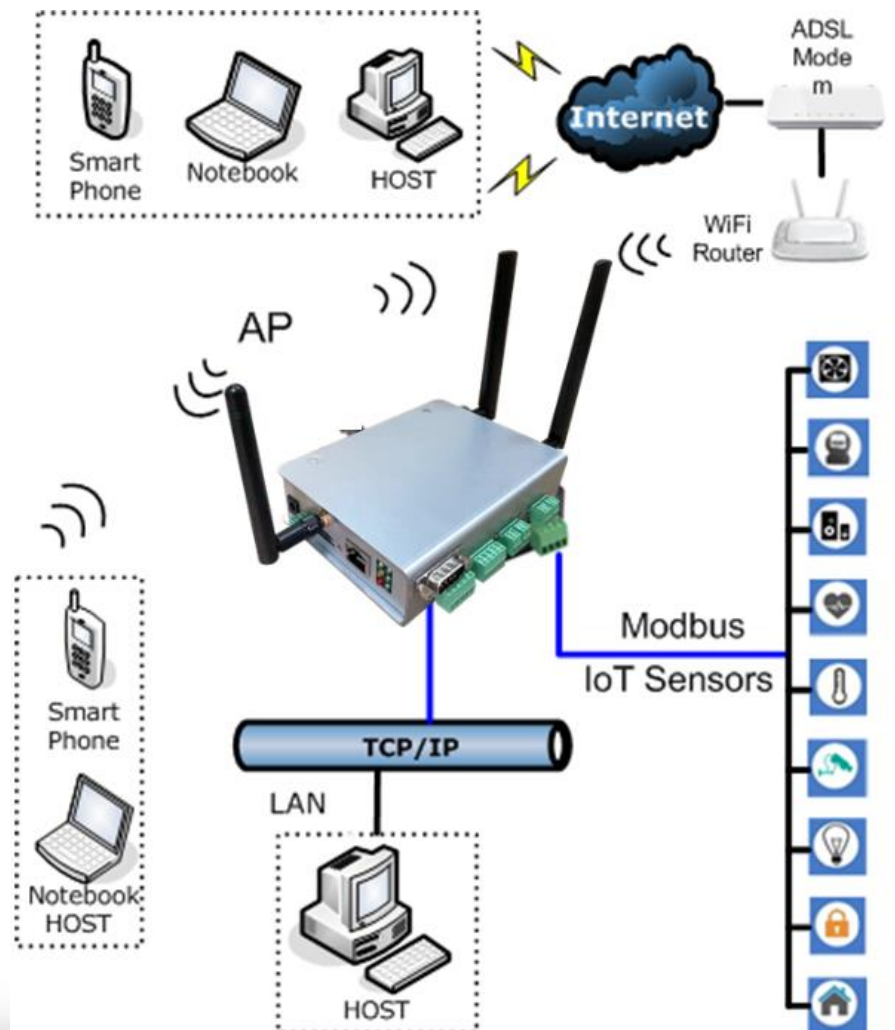

Specification

Digital Input / Digital Output

- Digital Input * 2 Pins (Active High / Active Low Selectable)
Dry contact : Logic level 0 : close to GND , Logic level 1 : open
Wet contact : Logic level 0 : 0 ~ 3 V, Logic level 1 : 5 ~ 12 V
- Digital Output * 2 Pins (Active High / Active Low Selectable)
120VAC @2A, 240VAC @1A, 24VDC @3A

Mechanical & Environment

Operating Temperature : - 20 °C ~ 70 °C
Storage Temperature : - 25 °C ~ 80 °C
Dimensions : 180 * 120 * 35 mm (W * D * H)
Weight : 950 gm
RoHS : Compliant with RoHS

Power DC 9 ~ 32V, 1000mA 500mA@12V (Support DC Jack & Terminal Input)

LED SYS , WiFi, 4G

LAN-ACK, LINK , Serial 0 RX + TX
Serial 1 RX+TX, DO * 2 + DI * 2

Warranty Warranty period : 1 year

Order Information

WPC-832-4-DIO-4G : 4G Model
WPC-832-4-DIO : Without 4G

System

- CPU
- RAM
- ROM
- OS

Connectivity

- Ethernet 10 /100 M bps (Auto Detecting)
Built-in 1.5KV Magnetic Isolation
 - WiFi 2.4G WiFi IEEE 802.11 b / g / n
Support AP / Station
 - 4G LTE / NB-IoT (Option)
- *Mini-PCle : USB 2.0 for 4G / NB-IoT
*Nano SIM * 1

Interface USB2.0 (on PCB)

I2C Interface * 1 (For RTC)
SD Card Interface : micro SD card (For storage)

Serial Port

Port 1 : RS-232/422/485 * 1
Port 2 : RS-422/485 * 1
Speed : 300 bps ~ 230.4 K bps
Parity : None, Odd, Even, Mark, Space
Data Bit : 5, 6, 7, 8 ; Stop Bit : 1, 2
RS-232 Pins : Rx, Tx, GND
RS-422 : Rx+, Rx-, Tx+, Tx- (Surge Protect)
RS-485 : Data+ , Data- (Surge Protect)
15KV ESD for all signals
Console port : UART – RX+TX+GND

Others

RTC : Real Time Clock * 1 (Battery Backup)
Buzzer * 1
Reset Button * 1
4G LTE Reset GPIO * 1

0975-365-352



jerrypeng@maxlong.com.tw



30271新竹縣竹北市嘉豐七街139號9樓

